

Convection Ovens

Convection Ovens

- Excellent even baking results.
- Easy to use.
- Stand with lockable castors and storage available.
- Unique design allowing the unit to be able to take New Zealand 16 and 18 inch standard trays simultaneously.
- Double Glass door and lights allow easy viewing of the baking process without disturbing the product and baking process.
- Automatic fan reversal reduces static areas.
- Digitally controlled temperature.
- Digitally controlled timer 0-99 min.
- Adjustable oven damper vent.
- Steam function with timer (0-15 Sec).
- Constructed of stainless steel.
- Stainless steel fan.
- 5 tray oven and prover combination available reducing the footprint in the bakery.
- Easy to clean.
- Oven sizes are available in **5, 8 and 10 tray** configurations
- Flat foil keypad for easy cleaning.
- Units can be stacked on top of each other and configured in many different ways (Bake station, under prover, Left/Right hinged doors).

Prover For Convection Ovens

- Excellent Proving Results.
- Mounted on castors as standard.
- Use 16 and 18 inch standard trays simultaneously.
- 16 tray capacity in prover.
- Double Glass door and lights allow easy viewing of the proving process without disturbing the product and process.
- Digitally controlled temperature and timer (0-99 min.)
- Constructed of stainless steel.
- Can be combined with ovens reducing the footprint.
- Humidity setting is digital with auto fill water trays connected to mains water.
- Easy to use.
- Easy to clean.
- Flat foil keypad for easy cleaning.



Shown with optional prover



ESM-708E

Shown with optional stand

ESM-705E Convection Oven	
Oven Capacity	
Tray Size	460mm x 760mm
Tray Capacity	5
Oven Electrical Requirements	
Power	12.5kW
Voltage	400V
Phases	3, Neutral + Earth
Frequency	50Hz
Fuse	20A per phase
Connection	4-Pin PDL 56 PA 420
Dimensions	
Width	870mm
Depth	1360mm
Height	590mm
Optional Stand Dimensions	
Width	869mm
Depth	1159mm
Height	897mm


ESM-708E Convection Oven	
Oven Capacity	
Tray Size	460mm x 760mm
Tray Capacity	8
Oven Electrical Requirements	
Power	25kW
Voltage	400V
Phases	3, Neutral + Earth
Frequency	50Hz
Fuse	36A per phase
Connection	4-Pin PDL 56 PA 440
Dimensions	
Width	870mm
Depth	1360mm
Height	1140mm
Optional Stand Dimensions	
Width	869mm
Depth	1159mm
Height	567mm

ESM-710E Convection Oven	
Oven Capacity	
Tray Size	460mm x 760mm
Tray Capacity	10
Oven Electrical Requirements	
Power	25kW
Voltage	400V
Phases	3, Neutral + Earth
Frequency	50Hz
Fuse	36A per phase
Connection	4-Pin PDL 56 PA 440
Dimensions	
Width	870mm
Depth	1360mm
Height	1140mm
Optional Stand Dimensions	
Width	869mm
Depth	1159mm
Height	567mm


ESM-716F Optional Prover	
Capacity	
Trays	16
Prover Electrical Requirements	
Power	1kW
Voltage	230V
Phases	Single Phase
Frequency	50Hz
Fuse	5 amps
Dimensions	
Width	890mm
Depth	1280mm
Height	1060mm
Optional Canopy	
Dimensions	
Width	890mm
Depth	1600mm
Height	305mm

Convection Ovens

ESM-708E & 710E SERIES

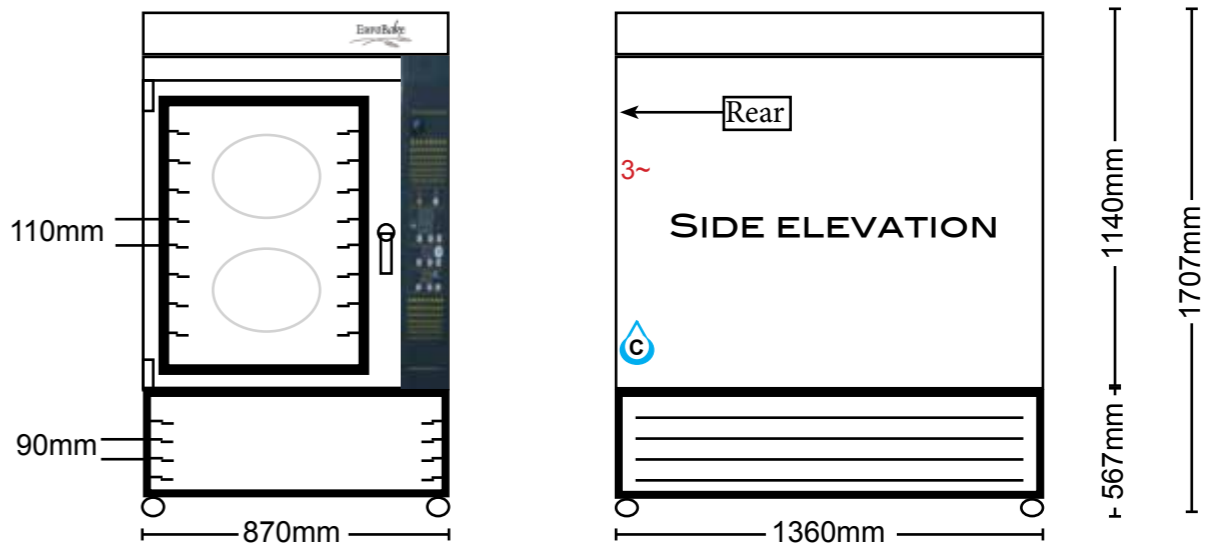

ESM-705E SERIES

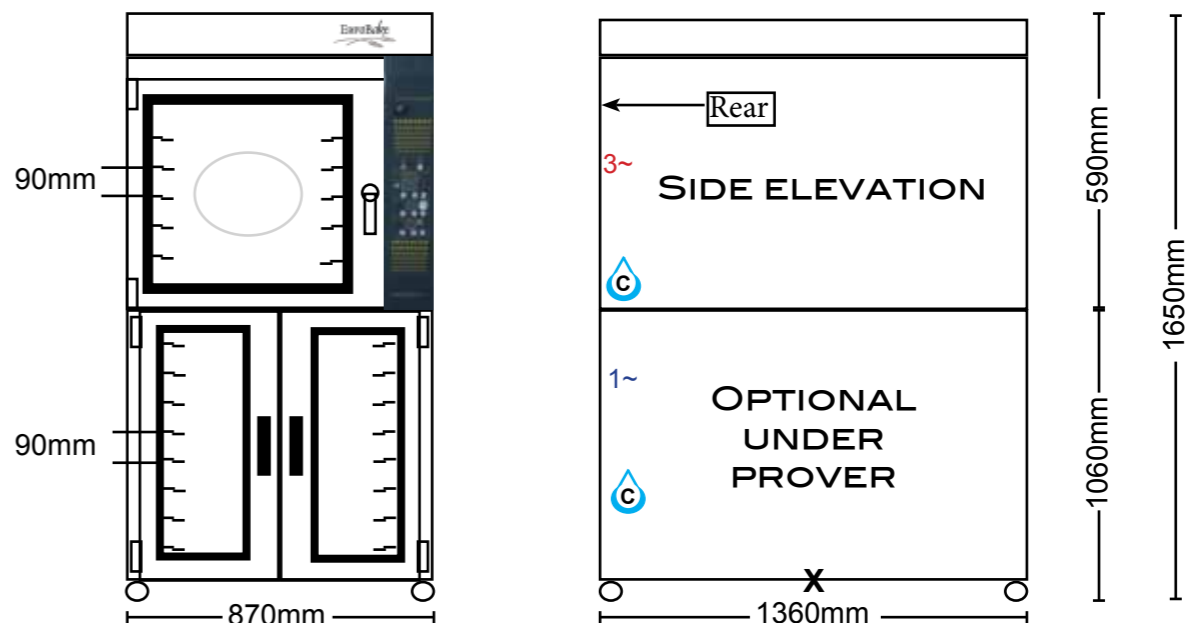

Left and Right hand hinged Convection Oven doors are available on request.

Stand for ESM-705E Series also available

3~ = 400V/3P/E Supply 1~ = 230V/1P/N/Earth Supply C = Water Supply X = Drain Outlet



BAKERY SERVICES LIMITED

Auckland Branch
11 Civil Place
Albany 0632

Phone: +64 9 4782445
Fax: +64 9 478 2145

PO BOX 101-999
North Shore Mail Centre
Auckland

www.bakeryservices.co.nz
info@bakeryservices.co.nz

Notes: